


16 max. operating torque series SM 87 with WSE xx.230AC

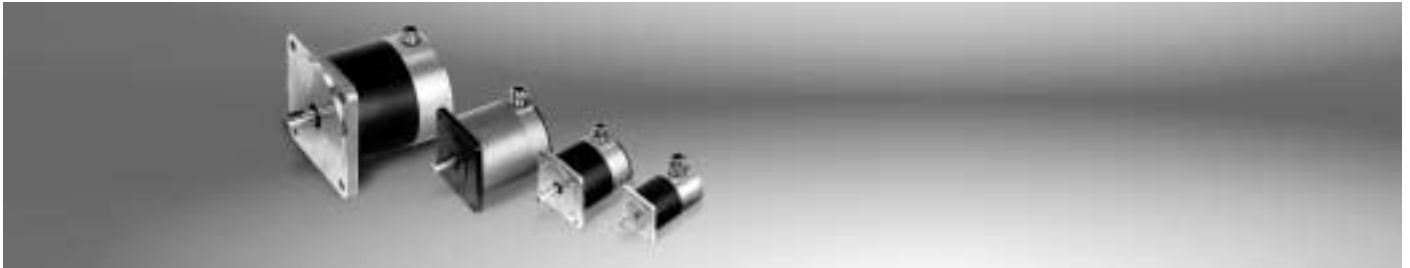


SM 168 SM 107 **SM 87/88** SM 56


All printed torque performance curves are measured with **STÖGRA drives** type WSE xx.230AC (320VDC).

- rectangular current characteristics
- - - - - rectangular current characteristics with 20% boost
- sinus current characteristics


SM 88.1.18M2 with WSE 04.230AC

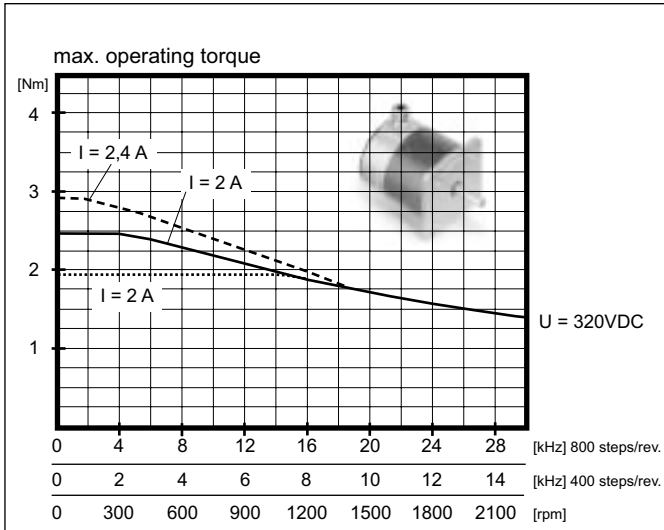

SM 88.2.18M2 with WSE 04.230AC

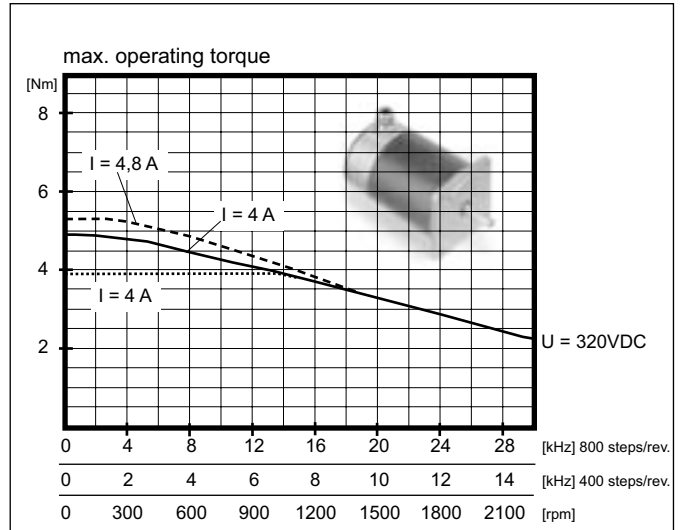

SM 88.3.18M4 with WSE 04.230AC

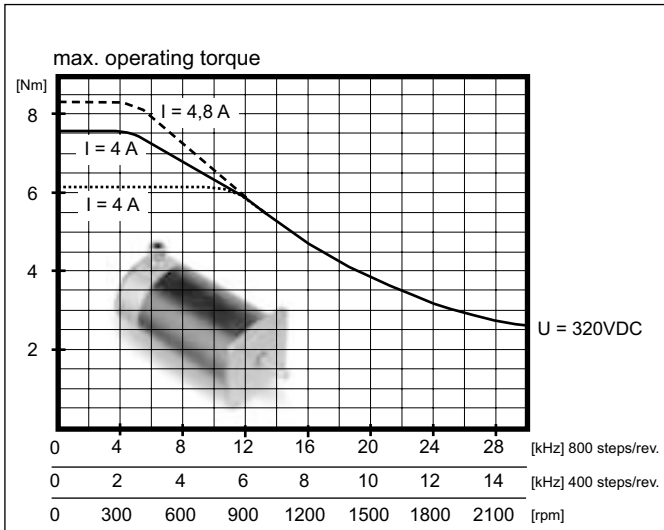

SM 88.4.18M4 with WSE 04.230AC

